

equipment specs

°KWIKFREEZE SPIRAL FREEZER SPECIFICATIONS


Model	KF13-225S	KF20-CR175S	KF20-350S	KF28-CR270S	KF28-400S	KF40-CR320S
Typical Production Rate* (lb/hr)	750 – 1,500	750 – 2,000	1,500 – 4,000	1,500 – 5,000	3,000 – 6,000	3,000 – 6,000
Tier Clearance (in)	3 ³ / ₈	3 ³ / ₈	4 ¹ / ₂	4 ¹ / ₂	4 ¹ / ₂	4 ¹ / ₂
Number of Tiers	10	10	10	10	8	8
Drum Diameter (in)	56	42	86	70	124	100
Usable Belt Length (ft)						
At Drum	160	120	260	200	280	230
At Pivot link	225	175	350	270	400	320
At Outside Link	225	225	350	350	400	400
Dwell Time	As required (5 – 45 min standard)					
Fans						
Horsepower (hp)	1	1	1	1	1	1
Number	8	8	8	8	8	8
Drive Horsepower (hp)						
Positive	1/2	1/2	1	1	1	1
Drum	1	1	3	3	3	3
Electrical Requirements	60A @ 230V	60A @ 230V	45A @ 460V	45A @ 460V	45A @ 460V	45A @ 460V
Internal Inspection Aisles						
Width (in)	17 & 22	17 & 22	20	20	20	20
Number	2	2	3	3	4	4
Total Estimated Weight (lb)	9,000	10,000	25,000	27,000	30,000	30,000

*Actual capacity is dependent on production load

KEY:

KF = °KwikFreeze
 First Number = Belt Width
 CR = Close Radius
 Second Number = Belt Length at Pivot Link
 S = Spiral

EXAMPLE:

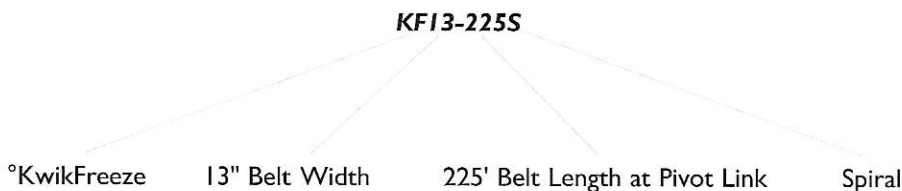

A division of The BOC Group, Inc.

575 Mountain Avenue
 Murray Hill NJ 07974
 USA
 Tel +1 800 742 4726
 Fax +1 908 771 1375

799 Pacific Highway
 15th Floor
 Chatswood NSW 2067
 Australia
 Tel +61 2 936 3666
 Fax +61 2 415 1954

24 Deer Park Road
 London SW19 3UF
 United Kingdom
 Tel +44 (0) 81 543 3911
 Fax +44 (0) 81 540 6557

23 Smits Street
 Industries West
 PO Box 4100
 Germiston South 1411
 South Africa
 Tel +27 11 873 8130
 Fax +27 11 825 4028

Thai Industrial Gases Ltd.
 15th Floor, Bangna Tower
 2/3 Moo 14, Bangna-Trad Road Km. 6.5
 T. Bangkaew, A. Bangplee
 Samutprakarn 10501
 Thailand
 Tel +66 2 312 0100
 Fax +66 2 312 0126