STEALTH[®] Metal Detector



OVFRVIFW.

Stealth metal detectors are custom manufactured to suit any application. The Stealth uses digital signal processing technology and has high sensitivity levels to ensure the detection of the smallest ferrous, non-ferrous and stainless steel contaminants. The built-in data collection software with USB data transfer establishes the Stealth as an effective critical control point complying with stringent HACCP regulations.

THE FORTRESS ADVANTAGE:

- "Never Obsolete" Commitment: detectors are always supported with parts and services
- Standard electronics configuration across product line allowing easy support and trouble shooting
- Modular design; have fewer components
- Custom built detectors or stock sizes
- Simple Operation, Outstanding Reliability, **Exceptional Performance**

KEY FEATURES:

- Contact Reporter Software Included
- Detailed USB Data Collection
- Digital Signal Processing Technology
- Ultra Sensitive Detection
- AutoTest: Self Diagnostic Testing
- Easy "Fast" Calibration
- System Set-Up in Seconds
- Flash Memory Stability
- Multi-Level Password Protection

APPLICATIONS:

- Bakery
- Meats
- Dairy
- Prepared Meals
- Packaged Products
- Pharmaceutical

- Nutraceutical
- Confectionery
- Fresh Foods
- Frozen Foods
- Powders/Grains
- **AVAILABLE OPTIONS:**

 BSH Rugged Casing for Harsh Environments



 Integrated Vector Conveyor Systems




HALO **Automatic Testing System**

 Contact Communication Software



vendas@fortress-iis.com.br

STEALTH[®] Metal Detector

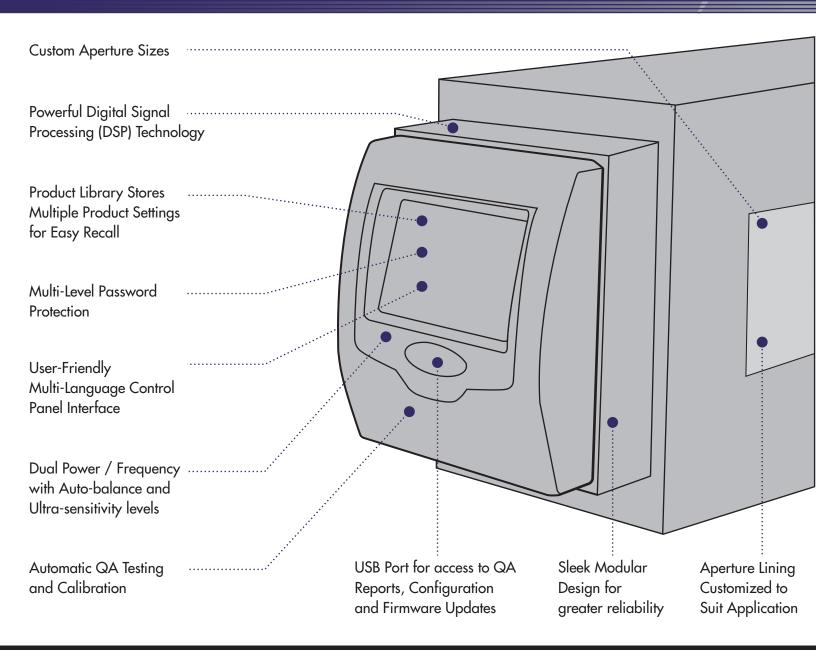

DETECTOR OPTIONS & SPECIFICATIONS:

| Construction | Aluminum epoxy painted or Stainless Steel |
|-------------------------|--|
| BSH Extra-Rugged Casing | Vibration immunity and stability in heavy duty applications and harsh environments |
| Aperture Lining | Epoxy resin for heavy wash down or dry liner for wipe down applications |
| Rating | Aluminum: Nema 4 / IP65 or Stainless Steel: Nema 4X / IP69K |
| Remote Mounting | Display panel terminal can be mounted remotely (Up to 4,000ft / 1,200m) |
| Network Communications | RS485, Ethernet / Wireless via Contact Communications Software |
| Electrical | 100-240v Single phase, 1amp, 50-60Hz |

