


**NEW DESIGN**




- Open channel frame
- New blade guide mounting
- Improved AccuBand blade system

### COMMON FOOD APPLICATIONS



Bacon




Cheese



Fresh Meats



Fresh Produce



Lunch Meats



Pizza



Plant Based



Sandwiches

# SLICER/APPLICATOR


PRECISELY SLICE & APPLY A VARIETY OF FOOD PRODUCTS ONTO YOUR PROCESSING LINE

The Slicer/Applicator slices and applies a wide range of products directly onto your processing lines in multiple lanes with precise targeting. Customize to your operation with head and lane configurations, slicing zone size, left- or right-hand orientation, and cantilevered design. Continuous product loading with gravity feed reduces downtime and maintains slice quality. Its new sanitary design features an open channel frame and easy access for fast and thorough cleaning.

- Slice and apply or bulk slice up to 150 strokes per minute, per lane; stack and shingle up to 120 strokes per minute, per lane
- Customize height, frame orientation, head, and lane configurations
- Easy-to-use touch screen controls with optional upgrade to track maintenance and access manual
- Continuous product loading reduces downtime
- Sanitary design with new open channel frame, easy access chamber, and compact guarding
- Updated AccuBand® blade system features improved setup for optimal blade life



# SLICER/APPLICATOR

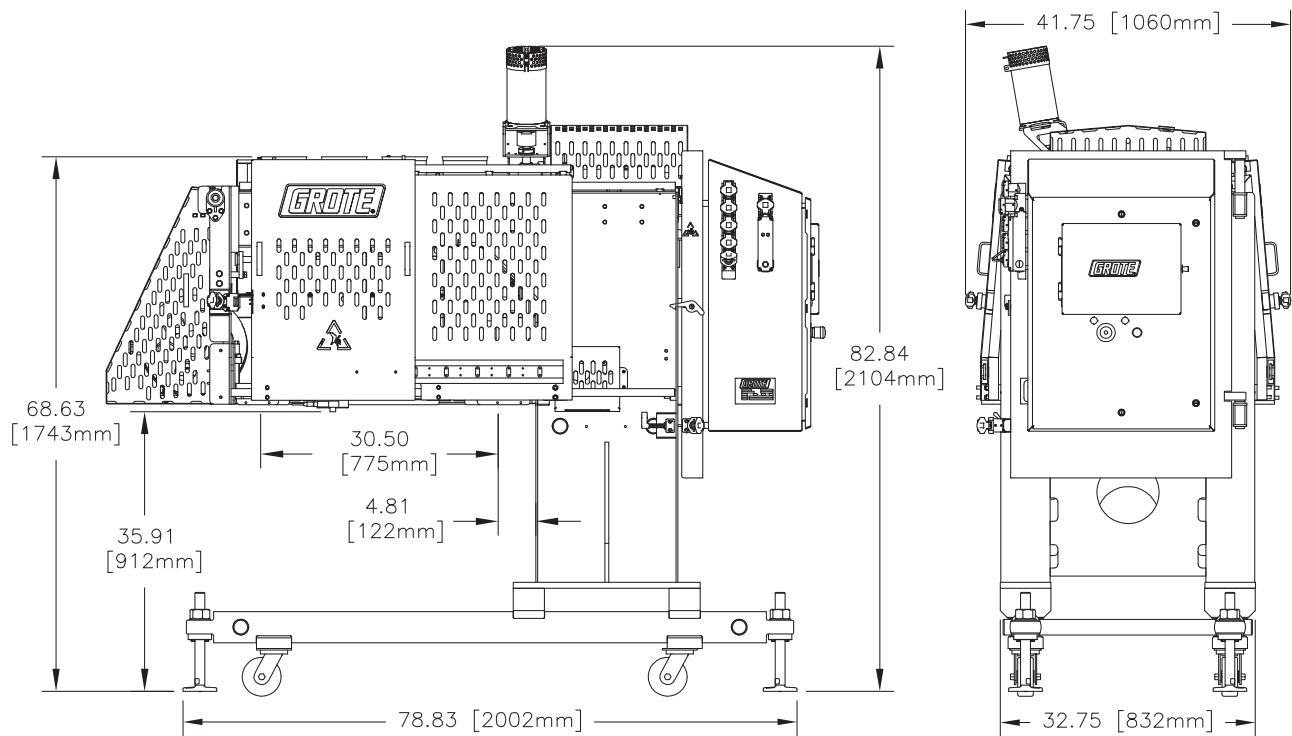

ALL DIMENSIONS ARE APPROXIMATE  
PRIMARY DIMENSIONS IN INCHES

This drawing contains confidential information is the exclusive property of the J.E. Grotte Co. Neither this document, nor its contents, are to be used, reproduced or disclosed in whole or in part without the express written permission of the J.E. Grotte Co. Copyright 2023, J.E. Grotte Company, Inc.

## SPECIFICATIONS

Product Size:  
up to 6" (152.4 mm) diameter

Slice Thickness: up to .5" (12.7 mm)  
standard, up to 1.5" (38.1 mm) optional

Slicing Zone Widths: 22" (558.8 mm),  
30" (762 mm), or 40" (1016 mm)

Electrical: 200-575 VAC, 50/60 Hz, 3 Phase

Water: 40-100 PSI (required with  
some products)

## FEATURES/PARTS

- Multiple head and lane configurations available
- Custom product holders per application
- Target and Bulk Slice modes
- Continuous gravity feed
- Open channel frame
- IP69K stainless steel motors

## OPTIONS

- 522E, 530E and 640E models available
- Low-level sensor
- Electronic Thickness Adjust
- HMI upgrade with larger screen, maintenance logging, and manual access

E 11.23v6

## CONTACT US

Grotte Company is proud to provide top quality equipment, exceptional service and peace of mind worldwide. Contact us for more information or to schedule a demo of the Slicer/Applicator with your product in your exact operating conditions in our Demo Facility.



To feed our growing world - Together

sales@grottecompany.com  
grottecompany.com