

Supervac AT 8 Hot Water Shrink Tank

- All stainless steel construction.
- Heating by electricity and/or steam.
- Digital programmable controls (menu driven).
- Silent running Intralox conveyor belt guarantees safe product flow.
- Fully insulated – minimum heat loss.
- Reduced energy consumption.
- Integrated adjustable vapour exhaust.



- Easy to clean.
- Easy to service.
- Total immersion gives maximum shrink and best product appearance.
- Switchable to non-dipping mode for laminate bags.
- Reduction of water surface to prevent heat loss and evaporation.

The Supervac hot water shrink tank AT 8 with a feed-through width of 660mm is designed to match Supervac models GK195, GK169B and GK501B.

supervac


The Compact Supervac Concept



Dipping platform accessible without draining of water. Lid and platform swing upwards and the basin is freely accessible for cleaning.

- Automatic control of water level.
- Automatic temperature control with digital display of actual and set values.
- Adjustable dipping time, adjustable dipping depth.
- Adjustable time for drip off.
- Stand-by function for dipping: the drive motor of the dipping platform is switched off when there is no product on the way.
- Stand-by function for vapour exhaust: ventilator is switched off when there is no product on the way.
- Outfeed roller conveyors (optional) – ARB1000 for boxing - height angle adjustable - with basin and drain for drip-off water – alternatively ARB180 for discharge to other conveyors.
- Integrated control for infeed and outfeed conveyors (optional).

Compatible with Supervac automatic vacuum packaging machines to give the perfect line for shrink bag packaging.

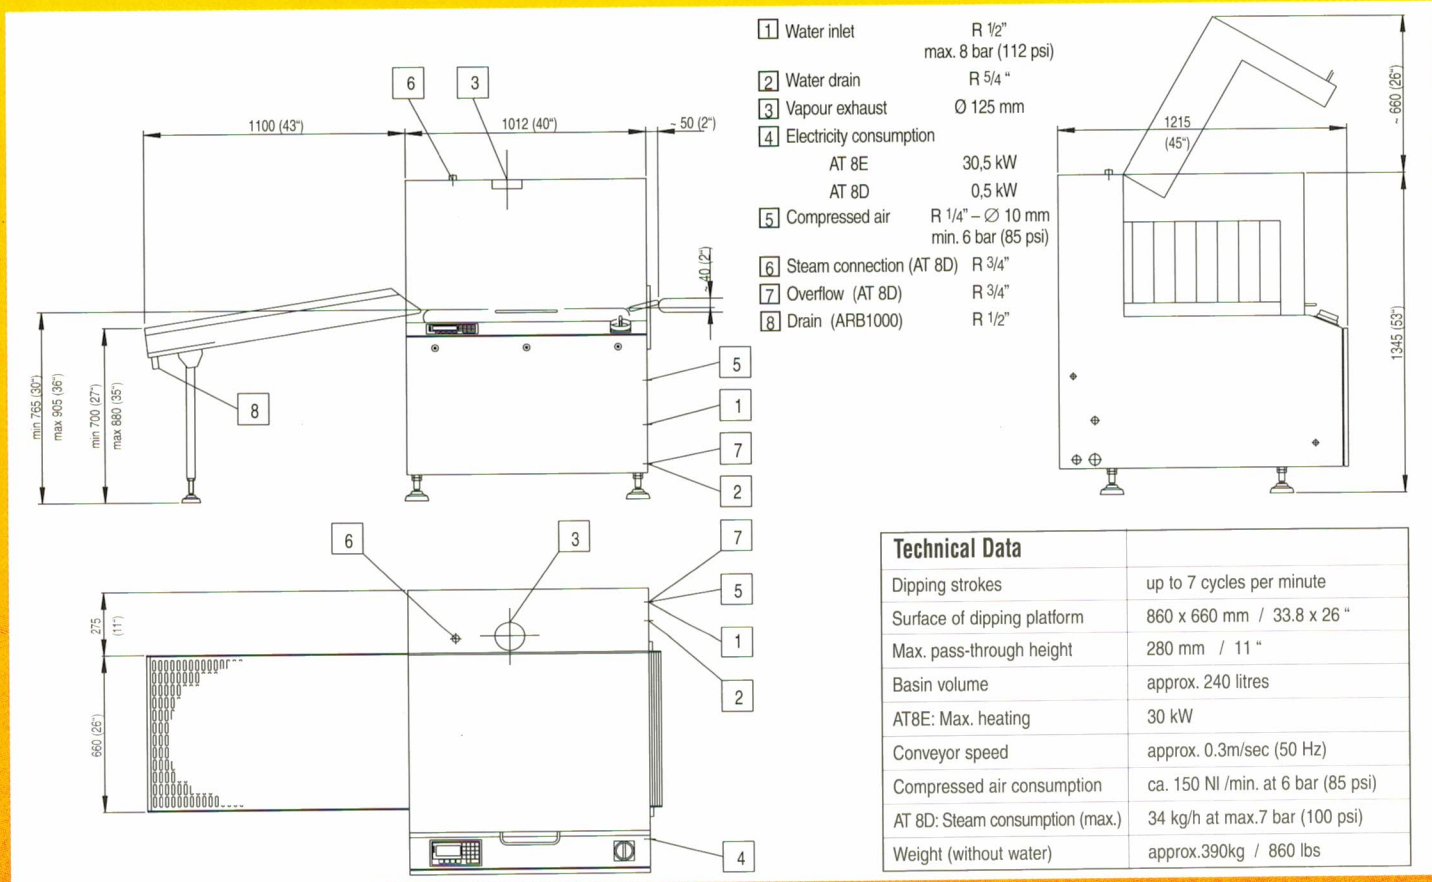

Subject to change without notice



REISER

ROBERT REISER & CO., INC.
725 Dedham St., Canton, MA 02021
(781) 821-1290 FAX (781) 821-1316